

# FlowHUB ViscoCorrect

## For use with water and most water based fluids

Based on the proven technology of the FlowHub, the FlowHUB ViscoCorrect has all the benefits of the 'Ultimate' version plus, some mechanical parts and adaptors have been changed to Stainless Steel to provide full compatibility with water and most water-based fluids.


The software has also been modified to adjust the flow readings due to changes in viscosity.

The FlowHUB ViscoCorrect can measure and display flow and temperature readings as well as switch and transmit flow values. This enables a system designer to trigger alarms, shutoffs and transmit real-time values to a PLC using just one component, instead of up to six which might have been required conventionally. This represents a significant cost saving in terms of reduced complexity of wiring and far fewer components.

**For further information and compatibility advice with your fluid application, please contact our sales department.**

### Features

- **MECHANICAL PARTS**  
compatible with water and most water-based fluids
- **FLOW:** 1 - 240 lpm,  
0.25 - 64 US gpm
- **PRESSURE:** Up to  
420 bar, 6,000 psi
- **EASY** to operate  
4 digit LED display  
3 large keys
- **TEMPERATURE**  
measurement built-in
- **TWO** programmable  
switches.
- **COMPLETE** with adaptors  
fitted (BSP or JIC Male)
- **EASY INSTALLATION**  
Install straight after a bend.  
Allows reverse flow
- **TRACEABLE** calibration on  
request

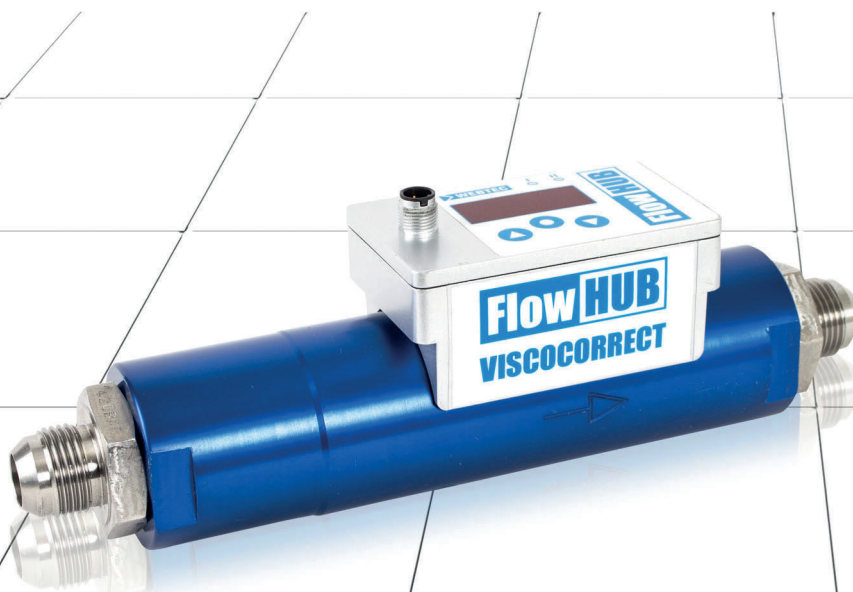

*Webtec, FlowHUB and ViscoCorrect are registered trademarks of Webtec Products Limited.*

*Webtec reserve the right to make improvements and changes to the specification without notice*