

VFD190 Series

Variable Priority Flow Dividers

Aimed at mobile and industrial applications the VFD190 can be used for controlling hydraulic motor and cylinder speeds by manually adjusting the flow rate.


Variable priority flow dividers split a single input (P) flow into a priority (REG) flow and an excess or by-pass (BP) flow which can be returned directly to the oil reservoir or used to power a second system. This is possible due to the valve's adaptive pressure compensation characteristics meaning both the priority and by-pass flows can be used to drive separate circuits, even under varying loads. In many instances this dispenses with the need for another pump to operate a second system.

The VFD190 design has also been optimised to reduce energy wastage by minimising the pressure losses across the valve, resulting in a significant reduction in running costs.

Specifications

Maximum Rated Pressure:	Up to 420 bar, 6000 psi
Total Flow:	Up to 190 L/min, 50 US gpm
Maximum Priority (REG) Flow:	Up to 150 L/min, 40 US gpm
Porting:	BSPP, SAE
Material:	Steel components in cast Ductile Iron body painted black Aluminium knob
Weight:	3.5 to 4.0 kg, 7.7 to 8.8 lbs
Mounting:	2 Bolts - M8 or 5/16"

Symbol:



Make it **BLUE**

Features

- Clearly marked single-turn hand dial permits fast visual adjustments to predetermined 'Priority' flow and fast easy adjustments of 'Priority' circuit to meet varying requirements.
- Pressure compensated permitting both 'Priority' and 'By-Pass' to be used simultaneously at varying pressures without affecting the 'Priority' flow rate.
- Anti-tamper locknut option available. Contact Sales Office for more information.
- Needle Valve can be pulled back to allow intermittent reverse flow.

Sales Order Code

Please contact our technical sales team to discuss any special order requirements.

TYPICAL CODE	DESCRIPTION	SEE TABLE	YOUR CODE
VFD190	Basic Valve	-	
RD	Valve Type	Table 1	
250	Priority (REG) Flow Capacity	Table 2	
B3	Porting	Table 3	

Table 1: Valve Type

CODE	DESCRIPTION
RD	Standard
LN	Lock Nut Version

Table 2: Priority (REG) Flow Capacity*

CODE	FLOW SIZE	
	L/min	US GPM
200	0 - 76	0 - 20
250	0 - 95	0 - 25
300	0 - 114	0 - 30
350	0 - 132	0 - 35
400	0 - 150	0 - 40


Table 3: Porting

CODE	PORT THREAD TYPE
B3	1" BSPP
S3	1-5/16" -12UN #16 SAE ORB

Note:
 *Input flow will affect the maximum seen priority flow capacity. To achieve the given flow capacity, the input flow needs to be greater.

Priority (Reg) Flow vs. Load


All tests completed using ISO32 Mineral oil at 40 degrees C (32 cSt)
 190 L/min Input Flow

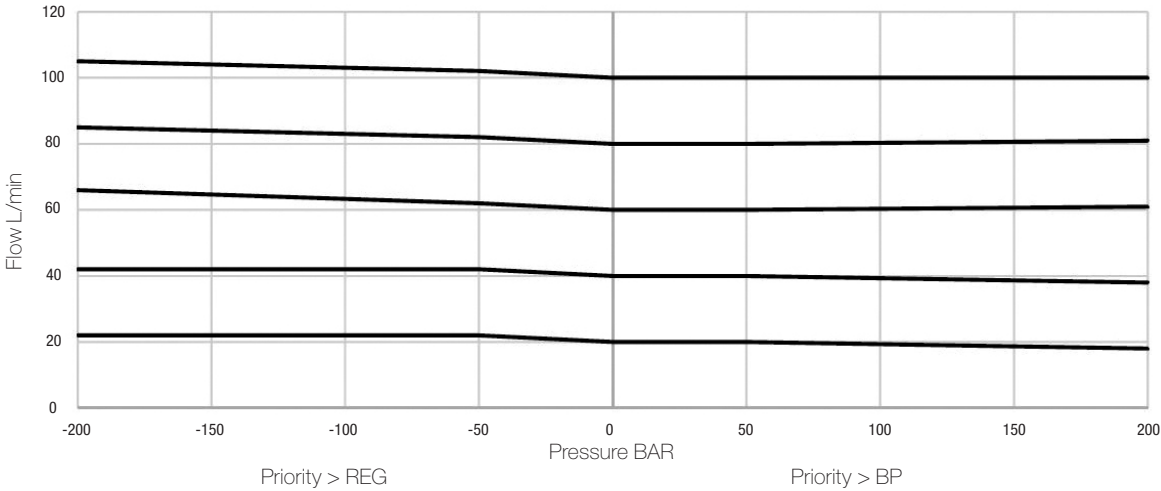


Pressure Drop Between Inlet (P) and priority (REG) port

All tests completed using ISO32 Mineral oil at 40 degrees C (32 cSt)


Inlet Flow - 190 L/min, REG port 100 Bar, BP port to tank

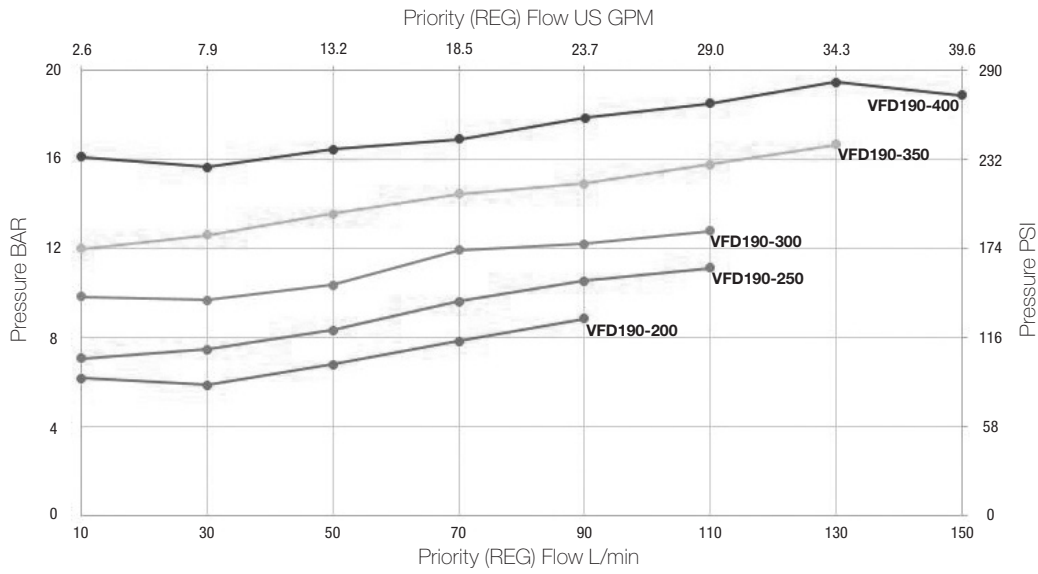

Installation Details Dimensions in mm [inches]

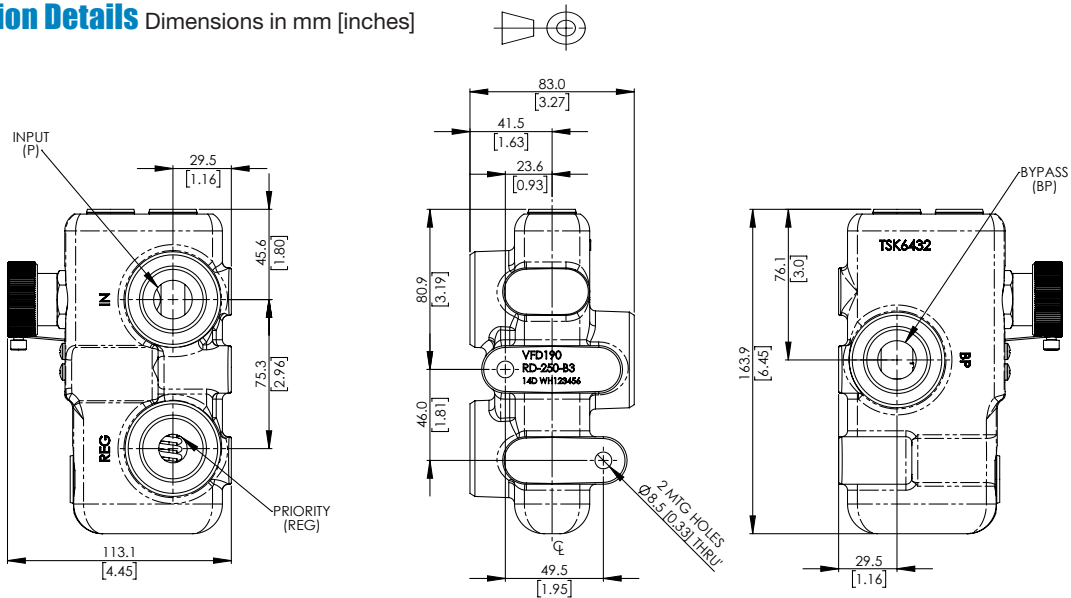

LN (Anti-Tamper Locknut Option)

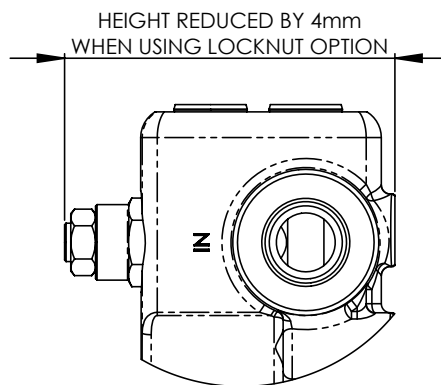


Select Sales Order Code 'LN' from Table 1 'Valve Type'.
Select flow size code from Table 2 'Priority (REG) Flow Capacity'.

Circuit Suggestions

1. Variable Speed of Hydraulic Motor Drive on Agricultural Tractor

This circuit gives the capability to vary the speed of a hydraulic motor as required. Also, for a given control knob setting, the hydraulic motor speed stays constant regardless of the tractor speed.

Circuit 1

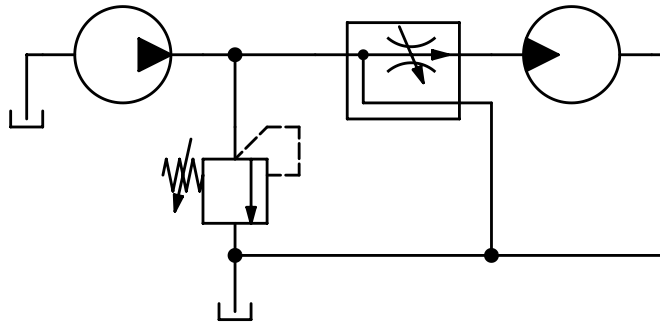


Circuit Suggestions

2. Two Circuits From a Single Pump

Using only one pump, this circuit gives speed control of the hydraulic motor and powers a hydraulic cylinder. Each function can be used either simultaneously or independently because pressure variations between Priority (REG) and By-Pass (BP) flows do not effect the flow on the Priority (REG) circuit.

Circuit 2

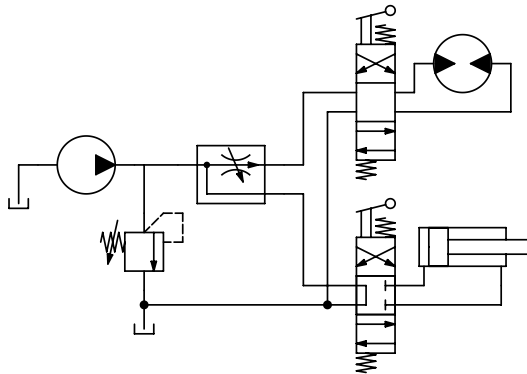

Circuit Suggestions

3. Multiple Circuits From a Single Pump

Using one pump, this circuit gives independently variable speed drive from three hydraulic motors. Motors can be used simultaneously or independently.

Circuit 3

